


Strip-Blade Doctoring System - C30/C30S/C38/C38S

Models available, C-models
 Lieferbare Modelle, C-Modelle

Strip-Blade Holder protrusion (blade inclusive):
Überhang des Strip-Blade Raketalters (mit Messer):

23-30 mm; minimum 23 mm!

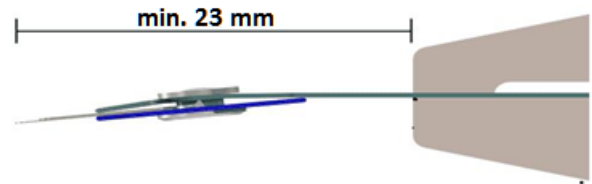

Model	Carrier plate thickness	Holder width (without blades)	Neg./pos. doctoring
Modell	Materialstärke	Trägerbreite (ohne Messer)	Neg./pos. Abrakelung

Stainless steel

C 30, C 30 S	0.30 mm	30, 35, 40, 50 mm	positive
C 38, C 38 S	0.38 mm	30, 35, 40, 45, 50, 55, 60, 65 mm	positive

Please note:

C 30, C 38 models, positive doctoring/trailing blade:

Total width (height) = Holder width + 5 mm (blade protrusion)

- **Doctor blades:** 10 x 0.065 mm, 10 x 0.076 mm, 10 x 0.102 mm, 10 x 0.152 mm.
- **Backing blades:** 8.0 x 0.152 mm, 8.5 x 0.152 mm or 9.0 x 0.152 mm.

Example: Doctor blade 10 x 0.076 mm + backing blade 8.5 x 0.152 mm gives a “wiping blade tip” of 10 – 8.5 mm = 1.5 mm blade tip (compare with a lamella blade).

C 30 S, C 38 S models, positive doctoring/trailing blade: Total width (height) = Holder width + 3/4 mm (blade protrusion).

- **Doctor blades for C30S and C38S-models** (no backing blade required):
 10 x 0.065 mm, 10 x 0.076 mm, 10 x 0.102 mm, 10 x 0.152 mm doctor blade only.

No backing blade required! (**S** = Single blade in holder)

These holders are made for very steep doctor blade angles and low blade pressure applications only!

Document: ICU 02 00501 ENG
 Revision: 0
 Release date: 2016-03-03

AkeBoose Graphic Products AB
 Agavägen 28
 2015-08-26SE-181 70 Lidingö
 Sweden

E-mail: info@akeboose.com
 http: www.akeboose.com
 Tel: +46 8 544 819 20
 Fax: +46 8 544 819 29